


# 汎用ISPケーブル

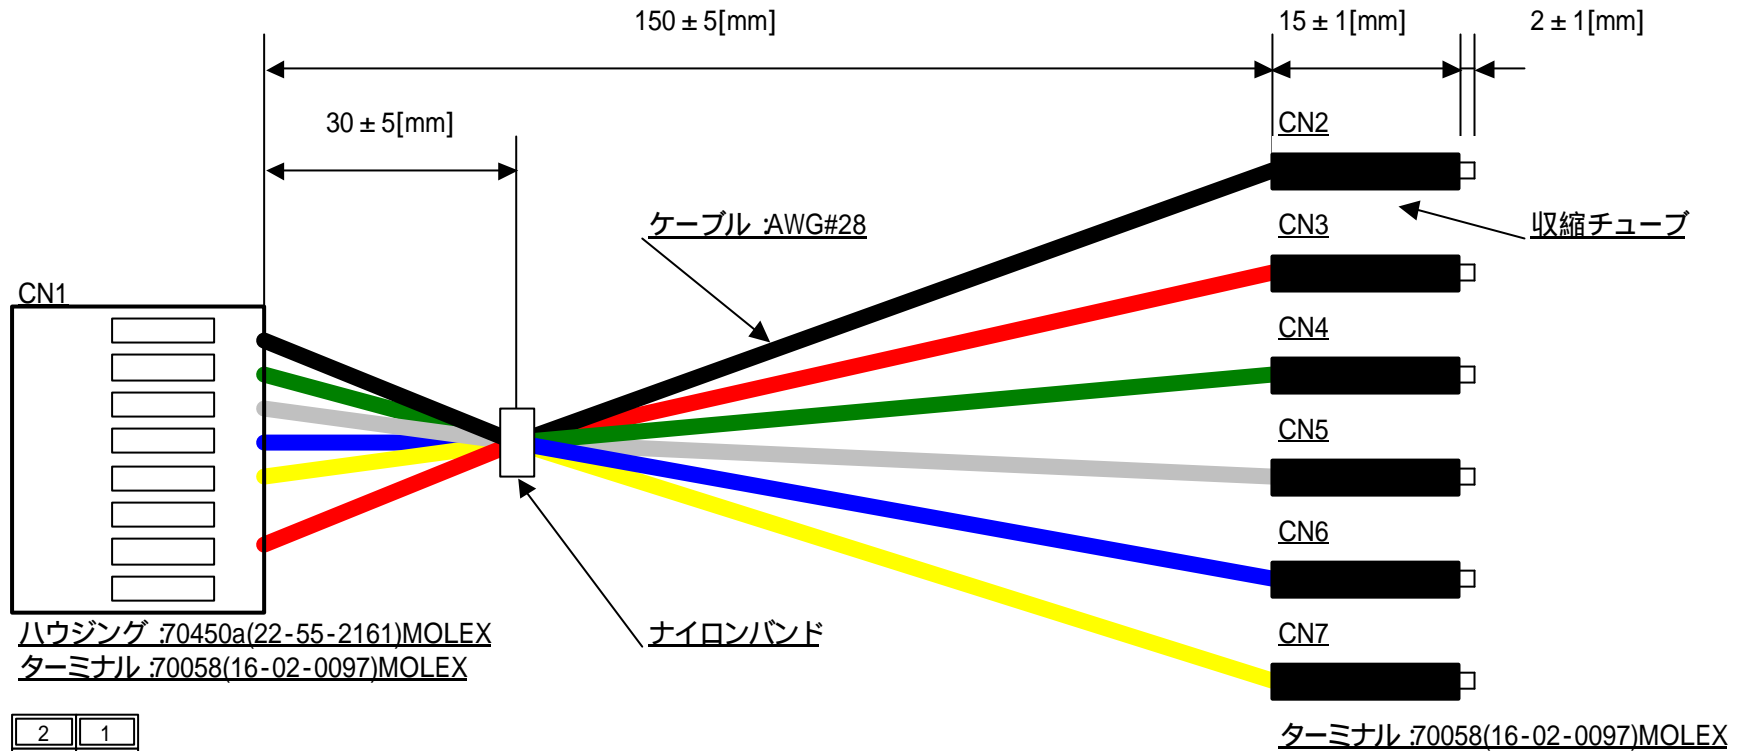

2	1
4	3
6	5
8	7
10	9
12	11
14	13
16	15

差込口から見たピン配置

ケーブル		コネクタ							Signal		
Wiring No.	Color	CN1	CN2	CN3	CN4	CN5	CN6	CN7	C2I	SPI	JTAG
1	黒色	2	1	-	-	-	-	-	GND	GND	GND
2	赤色	14	-	1	-	-	-	-	VCC	VCC	VCC
3	緑色	3	-	-	1	-	-	-	C2CK	SCK	TDI
4	白色	5	-	-	-	1	-	-	-	MOSI	TDO
5	青色	7	-	-	-	-	1	-	-	RESET#	TMS
7	黄色	9	-	-	-	-	-	1	C2D	MISO	TCK